


Secure Wireless Setup - Mac OS 10.4

Laptops on-campus only

Configure System Preferences


1. Click on the Apple menu icon in the upper-left corner of the screen and open **System Preferences**.
 - a. Click on the **Network** icon near the middle of the window.
 - b. Next to **Show:** select **AirPort**.
 - c. In the **AirPort** tab, set the option next to "By default, join:" to **Preferred networks** and if **ap-hamilton** is listed as a preferred network in the list below, remove it by highlighting it and clicking the little minus sign below the list.
 - d. Click **Apply Now**.

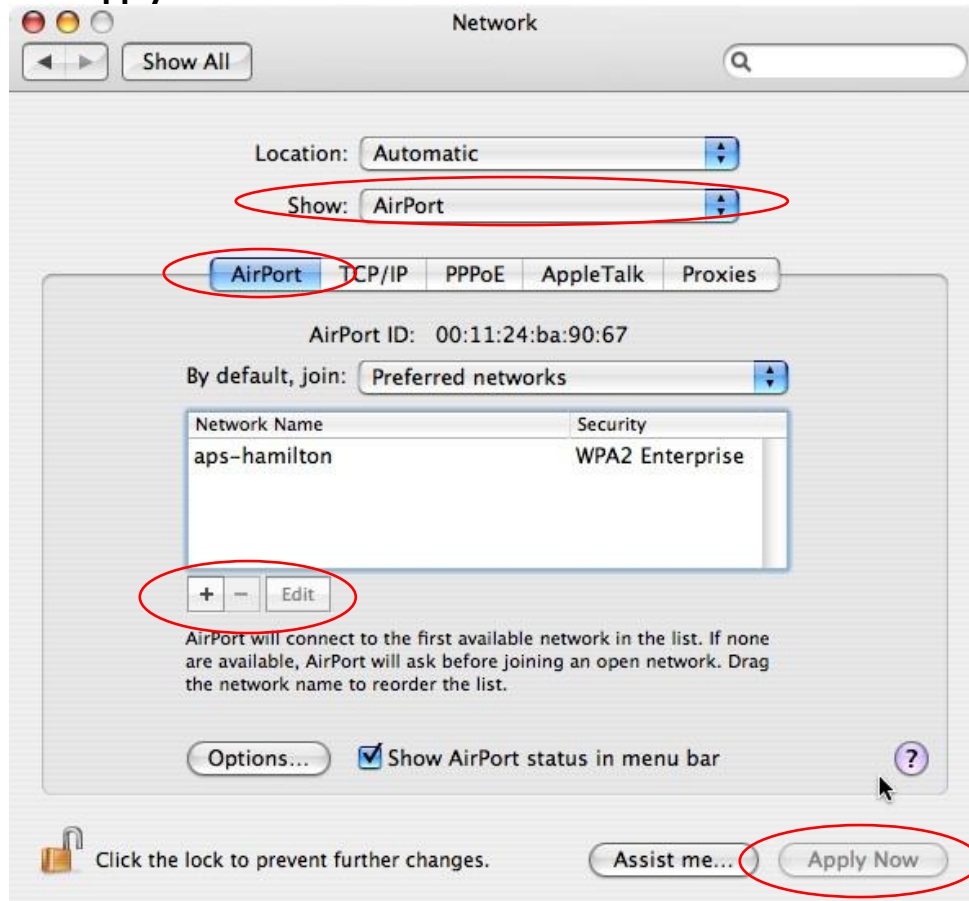

- e. Quit System Preferences.


Configure Wireless Network Profile

1. Click on Airport icon in menu bar and select **Open Internet Connect**.




2. Click on **File** and select **New 802.1X Connection**.
3. Next to *Configuration* click on the double arrow and select **Edit configurations**.
4. In the Configuration window configure the following:
 - f. Type in the box labeled *Description*: **Hamilton PEAP**
 - g. Click on the double arrows in the field labeled *Network Port* and select: **AirPort**
 - h. Type in the box labeled *Wireless Network*: **aps-hamilton**

- i. In the box labeled *Authentication*: uncheck all except **PEAP**.
5. Click **OK**.

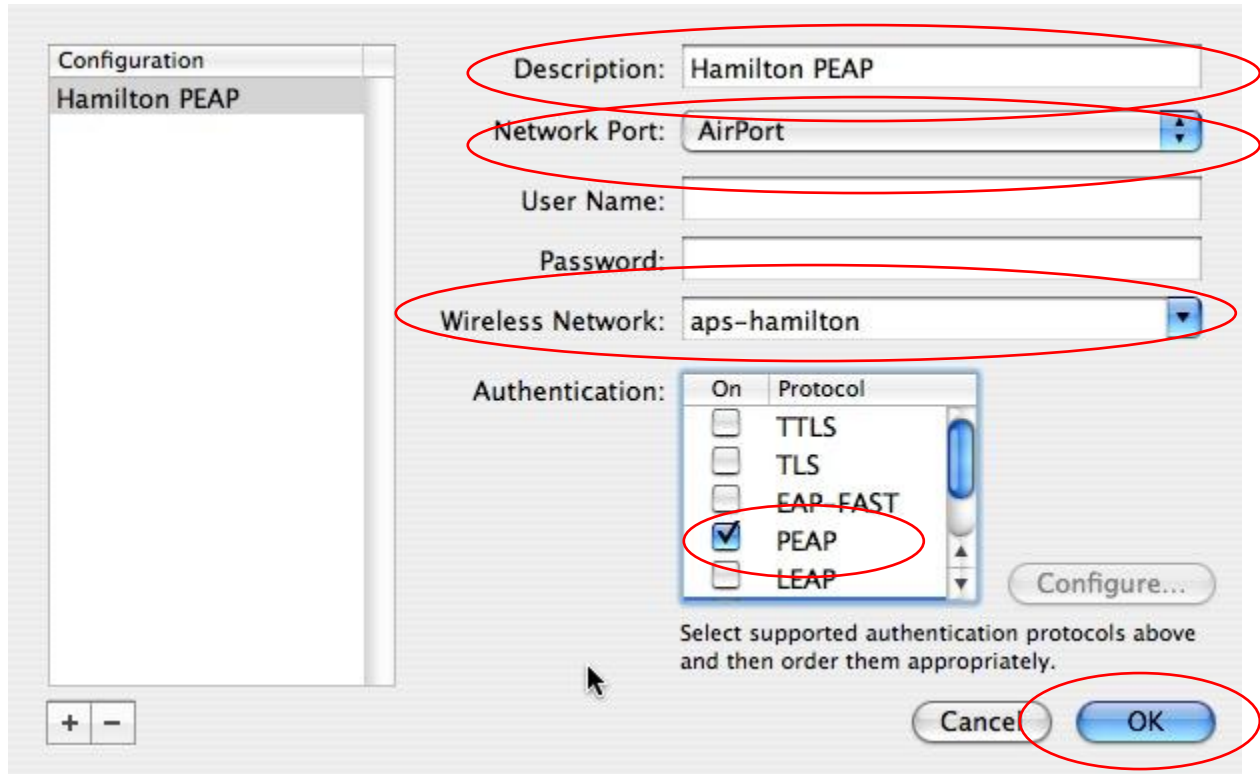


6. Click **Connect**.
7. Enter your Hamilton network username and password in the appropriate boxes.
8. Click **OK**.

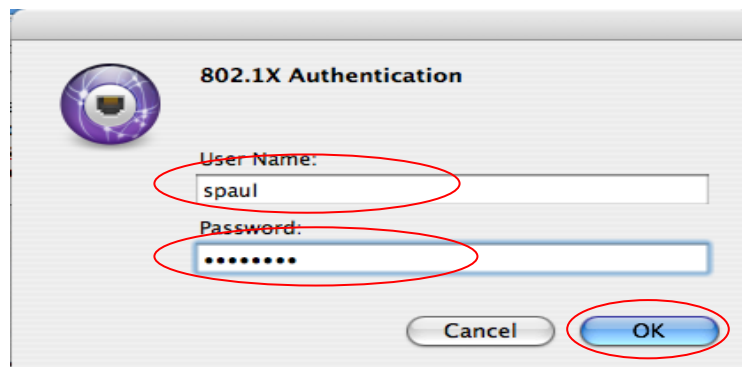

9. Click **Show Certificate**.



10. Click on the triangle to expand *Trust Settings*.
11. Click the double arrow in the field labeled *When using this certificate:* and select **Always Trust**.
12. Click **Continue**.

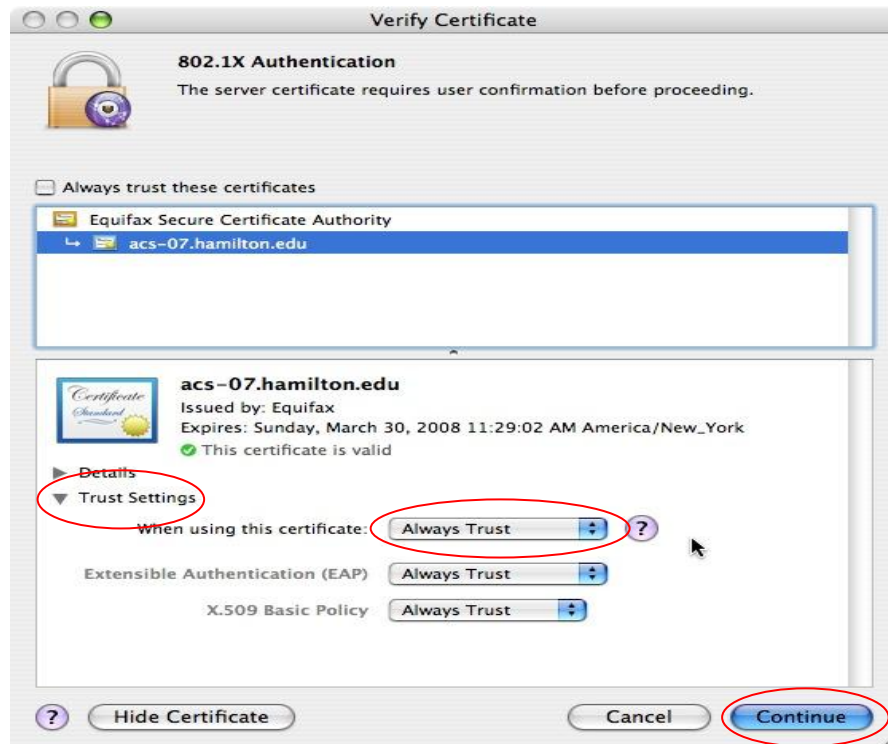

NOTE: You will be prompted to authenticate (as in step 7) each time the airport card attempts to reconnect to the secure wireless network. This will typically only occur when you restart the computer or log off and log back in. You should enter your username and password as previously directed to connect. You will NOT have to set the trust settings on the certificate after the initial setup.